


HUMANLAYER WORKFLOW CHEAT SHEET

pick a workflow when you create the task – every phase is a slash command (/rpi:<name>) you can also run by hand

Oneshot small and clear – the ticket already says enough to start


~40% of tasks

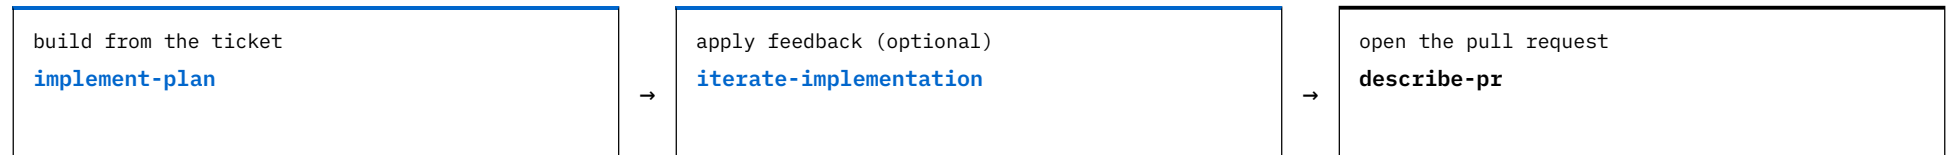

no plan artifact – copy tweaks, one-off scripts, bugs with an obvious repro

RPI medium – research the codebase, settle the design, then build


the default

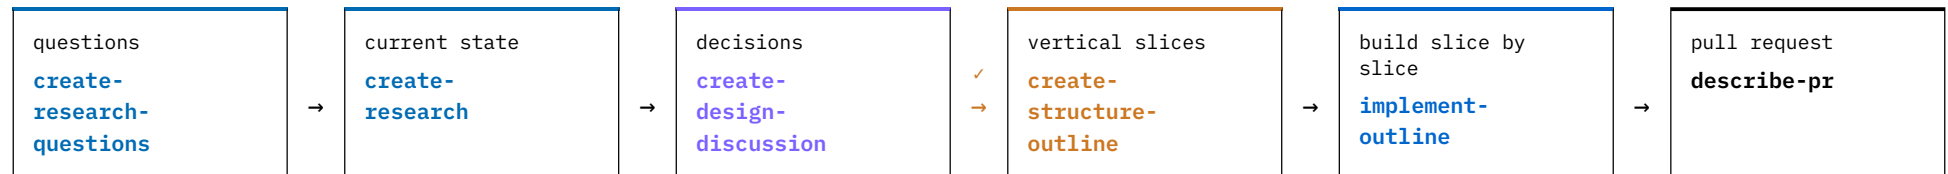

✓ you approve each design decision before the slices – worktree timing "Later" adds setup-worktree before build

PRD-Oriented large – product design and technical design each get a document

big features

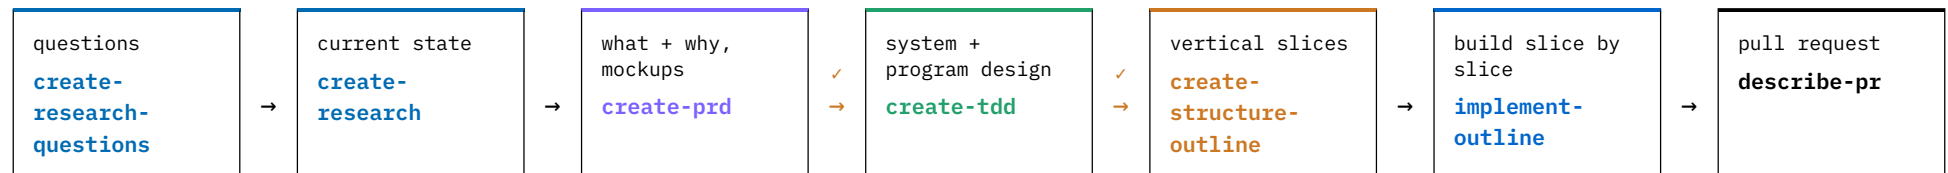

✓ you approve the PRD, then the TDD, before any code – skip the PRD for work with no product surface, like a big refactor

every create- has an iterate-

- `create-*` writes a new artifact
- `iterate-*` revises it in place, keeping the filename
- e.g. `/rpi:iterate-prd`, `/rpi:iterate-tdd`

anytime

- `/rpi:review-artifact-comments` – reply to doc comments
- `/rpi:setup-worktree` – create the task worktree
- `/rpi:ci-commit` – focused commits

why plan at all

- the agent builds in minutes; review still takes hours
- 30 minutes of planning saves hours of review
- every skipped decision gets made during code review instead